

# ELECTRONIC OFFPRINT

Use of this pdf is subject to the terms described below



This paper was originally published by IWA Publishing. The author's right to reuse and post their work published by IWA Publishing is defined by IWA Publishing's copyright policy.

If the copyright has been transferred to IWA Publishing, the publisher recognizes the retention of the right by the author(s) to photocopy or make single electronic copies of the paper for their own personal use, including for their own classroom use, or the personal use of colleagues, provided the copies are not offered for sale and are not distributed in a systematic way outside of their employing institution. **Please note that you are not permitted to post the IWA Publishing PDF version of your paper on your own website or your institution's website or repository.**

If the paper has been published "Open Access", the terms of its use and distribution are defined by the Creative Commons licence selected by the author.

Full details can be found here: <http://iwaponline.com/content/rights-permissions>

Please direct any queries regarding use or permissions to [washdev@iwap.co.uk](mailto:washdev@iwap.co.uk)

## Research Paper

# Pump it up: making single-pit emptying safer in rural Bangladesh

Soumya Balasubramanya, Barbara Evans, Rizwan Ahmed, Ahasan Habib, N. S. M. Asad, Luan Vuong, Mominur Rahman, Mahmudul Hasan, Digbijoy Dey and Miller Camargo-Valero

### ABSTRACT

Safe emptying and disposal of fecal sludge from pit latrines in rural areas has become a priority for the Government of Bangladesh. In this paper, we calculate the volume and characterize the hazards of managing sludge to identify technologies for safely emptying rural single pits. In Bhaluka subdistrict, an estimated 15,000 m<sup>3</sup> of sludge is produced annually. Physical, chemical, and microbial analysis of samples of sludge taken from pit latrines indicate that the sludge has a high moisture content of around 90%, a C:N ratio of 10:1, and a helminth presence of 41 eggs/g. In a field test of alternative emptying technologies, simple pumps such as the gulper emerged as feasible for use in rural areas, due to the liquid nature of the sludge, narrow roads, and limited incomes of rural households. The results suggest that current practices of emptying liquid sludge manually without any protective equipment poses risks to those who handle sludge, and the process needs to be semi-mechanized with immediate effect. These results are being used by the Bangladesh government to design policy for sludge management. In the near future, an organized service that safely empties single pits and transports sludge for treatment needs to be urgently designed.

**Key words** | Bangladesh, disposal, emptying, fecal sludge, rural, sanitation, single pit latrines

### INTRODUCTION

Several countries have made rapid progress towards the elimination of open defecation during the last 10–20 years. Of these, Bangladesh is one of the most notable. Between 2003 and 2015 the rate of open defecation in rural areas of the country is estimated to have fallen from 42 to 2% (WHO/UNICEF 2004, 2015; BRAC 2015). Taking population growth into account, this represents an additional 40 million

rural people using latrines during this period, a majority of whom live in rural areas. This rapid expansion in access to latrines was achieved through a variety of onsite interventions, but the most popular is the single pit latrine, commonly constructed by digging a pit and lining it with concrete rings before adding a slab and superstructure. Single pit latrines are considered to be a relatively cheap

**Soumya Balasubramanya** (corresponding author)  
International Water Management Institute,  
Sri Lanka,  
127 Sunil Mawatha, Pelawatte,  
Sri Lanka  
E-mail: s.balasubramanya@cgiar.org

**Barbara Evans**  
**Luan Vuong**  
**Miller Camargo-Valero**  
Institute of Public Health and Environmental  
Engineering,  
University of Leeds,  
Leeds LS2 9JT,  
UK

**Rizwan Ahmed**  
**Ahasan Habib**  
**N. S. M. Asad**  
NGO Forum for Public Health,  
4/6, Block-E, Lalmatia, Dhaka 1207,  
Bangladesh

**Mominur Rahman**  
**Mahmudul Hasan**  
Department of Chemical Engineering,  
Bangladesh University of Engineering and  
Technology,  
Dhaka 1000,  
Bangladesh

**Digbijoy Dey**  
BRAC, BRAC Centre,  
75 Mohakhali, Dhaka 1212,  
Bangladesh

**Miller Camargo-Valero**  
Departamento de Ingeniería Civil,  
Universidad Nacional de Colombia,  
Campus La Nubia, Manizales,  
Colombia

and effective method for separating humans from their excreta (O'Loughlin *et al.* 2006).

When they fill up, single pit latrines need to be emptied immediately if the latrine is to remain in use. Handling fecal sludge is associated with a number of health risks that include bacterial, viral and protozoan infections (Fewtrell *et al.* 2005; Dzwayro *et al.* 2006; Prüss-Ustün *et al.* 2014; Fuller *et al.* 2015). In Bangladesh, attention to this important component of sanitation has been given only recently; the Ministry of Local Government convened a National Committee for Fecal Sludge Management (NCFSM) in 2015 to draft frameworks for sludge management in rural and urban areas of Bangladesh. Among other things, the NCFSM is also working to identify technologies that would safely empty sludge from pits.

Current practices for emptying pits include the use of simple tools such as buckets, spades and ropes. Pits are emptied manually using a bucket. Pit emptiers often do not use any protective equipment while emptying pits; they use neither gloves nor other hand protection, and often disrobe to prevent their clothes from being soiled. Working in groups of 2–3, one emptier often climbs into the pit to empty it, while other(s) pass filled buckets to empty the contents nearby. Figure 1 shows the types of tools that are used. This emptying practice brings pit emptiers into close contact with fecal sludge, and requires an immediate solution.

To identify appropriate technologies for emptying pit latrines, it is necessary to first assess the volume of sludge that needs to be transported annually, which is based on the numbers of pits and their frequency of filling. Second, the exact nature of the hazardous materials to be emptied needs to be characterized in order to identify appropriate strategies to reduce risks to those who would handle

sludge. Finally, appropriate, locally available technologies for safer emptying of pits need to be identified. We examine these three factors for one subdistrict in Bangladesh. The subdistrict is envisioned by the NCFSM as the scale at which services would be designed.

## METHODS


We designed and carried out the study in Bhaluka subdistrict, which lies in Mymensingh district (Figure 2). The Census of 2011 records 91,547 households in rural Bhaluka; the average household has approximately four people (Ministry of Planning 2012). Ninety-two percent of all households use a latrine, with 67% of the households having access to a sanitary latrine, often a pit latrine (Ministry of Planning 2012). Bhaluka subdistrict is broadly representative of a rural district that is not affected by groundwater salinity.

### Calculating volume of fecal sludge produced annually

To determine the volume of fecal sludge that needs to be transported, the performance of a sample of latrines was studied. Data on the performance of 30 pits was used as the basis for estimating sludge accumulation rates. First, data from six single pit latrines was collected during June 2014 in Bhaluka. A two-stage selection process was used: first, six unions within the subdistrict were selected, and then one household with a pit latrine in each of the selected unions. The budget for studying pits was modest, consequently unions within Bhaluka were purposively selected on the basis of known geology, to provide some variation in the quality of sludge. Households were purposively selected because



Figure 1 | Simple tools currently used for pit emptying.

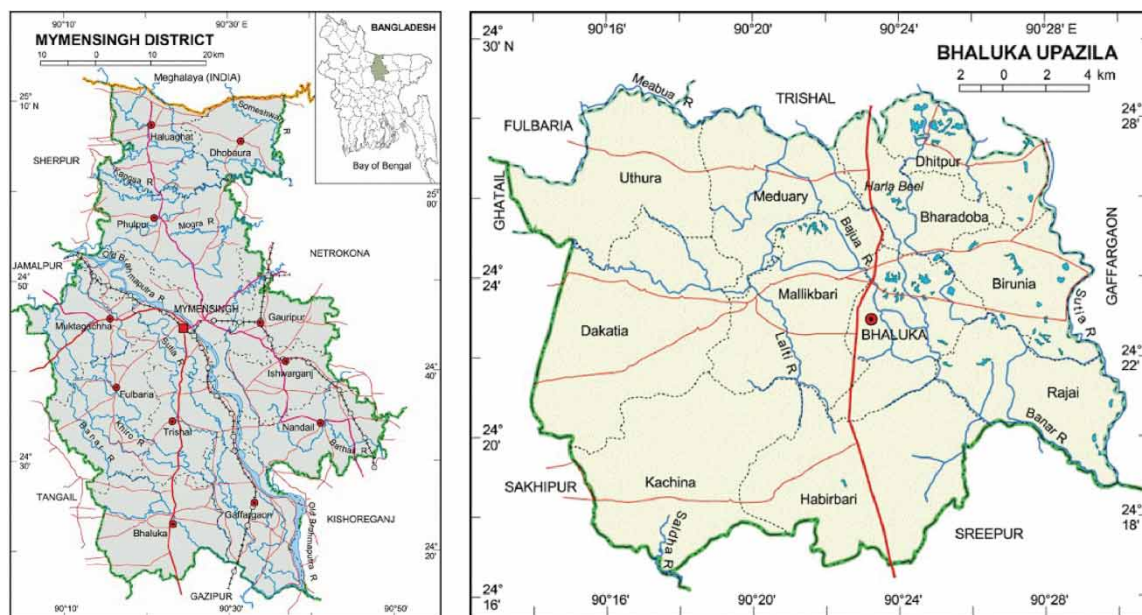

**Figure 2** | Bhaluka Upazila.

samples of fecal sludge (discussed in the next subsection) needed to be drawn from pits that were near-full.

Groundwater salinity can affect conductivity of and pathogen activity in sludge and hence have an influence on rates of accumulation. Bhaluka Upazila is not known to have a particular issue with groundwater salinity. To account for changes in sludge composition due to salinity, samples were also taken from pit latrines in the following subdistricts known to have groundwater salinity: Phultola in Khulna district (February 2014); Chhagalnaiya in Feni district (June 2014); and Senbagh in Noakhali district (August 2014). These additional districts were selected as they have been the focus of single pit latrine interventions by BRAC, a major non-governmental organization based in Bangladesh, especially in the past nine years. The time of sample collection was varied to allow for the effect of rainfall on the composition and rate of accumulation of fecal materials in the pit. Again, unions and households in each of the subdistricts were sampled purposively, with six unions selected in each subdistrict, and one pit in each union. Lastly, samples were also taken from one union in the Gazipur Sadar subdistrict of Gazipur district (four pits in February 2014, and four pits in July 2014), a semi-urban area with low salinity, for comparison. [Table 1](#) provides a summary of the pits from which data and samples were collected.

**Table 1** | Samples of fecal sludge from 30 pit latrines

| Subdistrict   | District   | No. unions | Pits/ union | Total pits (=samples of sludge) |
|---------------|------------|------------|-------------|---------------------------------|
| Bhaluka       | Mymensingh | 6          | 1           | 6                               |
| Phultola      | Khulna     | 6          | 1           | 6                               |
| Chhagalnaiya  | Feni       | 6          | 1           | 6                               |
| Senbagh       | Noakhali   | 6          | 1           | 6                               |
| Gazipur Sadar | Gazipur    | 1          | 6           | 6                               |

From each of the thirty pit owners, information on the number of regular users of the pit and the last time the pit was emptied was elicited. Then the pit was opened, and the height of the sludge and depth and diameter of the pit were measured.

Additionally, information on pit latrine depth and age was collect from BRAC which, between 2006 and 2014, was responsible for installing 9000 single pit latrines in Bhaluka.

### Sampling and testing fecal sludge

To characterize the hazards associated with handling fecal sludge, samples were collected from all of the sampled pit

latrines. After the pit was opened, the height of the sludge was measured with a pre-calibrated measuring stick. The stick was marked for bottom, mid and top layer sludge. Samples were drawn from each of the three layers. The stick was washed with fresh water and potassium-free soap prior to each sampling. Sludge collected from each layer was kept in a separate air-tight labeled plastic bottle.

The samples were transported to the laboratory in an ice box and stored in the freezer below 0 °C. Before analysis, a homogeneous test sample was created for each study latrine by mixing sludge from each layer of the latrine in equal proportions. Physical and chemical properties of the sludge were analyzed at the Bangladesh University of Engineering and Technology, and microbiological tests were carried out at the International Centre for Diarrheal Disease Research, Bangladesh (ICDDR, B). The methods and protocols followed for physical, chemical and biological tests are described in [Evans \*et al.\* \(2015\)](#).

### Testing pumps in the field

A literature review of emptying tools and technologies was undertaken. The use of a hand-held pump to empty the pits would reduce the likelihood of laborers coming into contact with fecal sludge, and small hand-held models are available in Bangladesh. Machines such as a Vacutug or Vacuum tanker can also be used to empty pits, which further reduces contact with fecal sludge. Completely mechanized systems have the advantage that fecal sludge can be transported away from the pit latrine in the truck itself, but these have higher capital costs than hand-held models.

A short online survey was implemented with a panel of 31 WASH experts across the globe who had worked in sanitation in developing countries. The purpose of this survey was to short-list a set of pit emptying technologies that could be tested in rural Bangladesh.

Subsequently, the research team engaged a team of pit emptiers to test the selected technologies. Four households in Pakhurchala Village in Bhaluka Upazila whose pits were close to being full volunteered to have their pits emptied. We chose to empty pits that were close to being full in order to understand how selected technologies performed according to the capacity of pits. The pit emptiers, who primarily collect and sort solid waste in the subdistrict

headquarter town, were trained by the research team in the use of the technologies and they observed the process of emptying. These emptiers were asked to provide feedback on their experiences of using the selected technologies and the suitability of using these technologies with respect to the depth of the pit, damage to the latrine, emptying time, ease of use in rural areas, ease of handling, and labor requirements. In addition, interviews were held with one group of pit emptiers in Dhaka City to provide feedback on the technologies they had used during the course of their work. Pit emptiers from Dhaka were included in the study because they are more familiar with the use of the semi-mechanized and mechanized equipment and could provide feedback based on longer experience of use.

### Ethical conduct

The University of Leeds Faculty of Mathematics and Physical Science, MaPS, and the Faculty of Engineering joint faculty research committee approved this study. All official and regulatory permissions necessary for conducting research in Bangladesh were coordinated and obtained by the NGO Forum for Public Health.

Participation in this research was voluntary and not remunerated. Potential participants were informed of the aims and purposes of the research, and the amount of time they would have to spare to provide the research team with the relevant data. Data was collected only after individuals/households had agreed to participate. All responses are anonymous and cannot be used to identify individuals or households.

---

## RESULTS AND DISCUSSION

### Volume of fecal sludge to be transported

From the 30 sampled pits, depths varied from 0.91 to 3.05 m. The diameter of all study pits was standard at 0.83 m. Records provided by BRAC show that pits constructed by BRAC typically have an average of three concrete rings lining the pit, and they all have the standard diameter of 0.83 m. Each ring is around 1 m in depth.



Pit filling rates were estimated based on the reported time since the previous pit emptying event, the number of regular users of the latrine, and the current amount of fecal sludge in the pit for the 30 sampled pits. Filling rates were calculated as 30–50 L per person per year, and typically this was associated with a period of approximately four years between emptying events. These findings were confirmed by a household survey, which showed that the mean age of pits was four years, and while only 20% had been emptied, the rest would be emptied shortly. These results are consistent with the literature, see for example Franceys *et al.* (1992), Still *et al.* (2009) and Brouckaert *et al.* (2013). Latrines are likely to fill up faster than this where non-household members are using them or where water tables are high, and more slowly where the number of users is lower or water tables deeper. These results are reported in Balasubramanya *et al.* (2016a, 2016b), a companion paper to this paper.

Inspection of the 30 pits revealed that many have some additional depth available for sludge storage below the lowest ring. We assumed this depth to be 0.50 m in most cases. We also assumed that households would tend to empty their pits when the contents reached to within a half-ring height of the top of the pit. Using these assumptions and data on pit depth from BRAC, this gives an average capacity per latrine pit of 733 L.

From the Census of 2011 we know that the average size of the household is around four persons. Assuming that the mid-point estimate of sludge accumulation (40 L/person/year) applies across our sample means that pits will fill up on average once in 3.68 years (three years and eight

months). The total number of pits that would therefore need to be emptied in Bhaluka is 20,760 and the total volume of sludge to be emptied each year is just over 15 million liters (15,000 m<sup>3</sup>).

It is worth considering how these results convert to the national level. Taking into account the fact that at least 40 million rural people have started using single pit latrines in the past ten years, there may be as many as eight million relatively new single pit latrines in rural Bangladesh. A conservative estimate therefore suggests that as many as two million pit latrines will need to be emptied annually, and this would be associated with a volume of sludge of 1,466 million liters (1.46 million m<sup>3</sup>).

### Risks with handling fecal matter

The resulting mean physical, chemical and microbiological characteristics of fecal sludge samples are reported in Tables 2 and 3. Typical moisture content is high at 90%, confirming that most pits contain relatively heavy wet sludge. On average, the carbon to nitrogen ratio found in fecal sludge samples is (10:1). The results reported in Tables 2 and 3 are consistent with those summarized by Niwagaba *et al.* (2014), although it is interesting to note the relatively low numbers of helminth eggs reported.

Microbiological characteristics reported in Table 3 confirmed the challenge in handling fecal sludge. In particular, the prevalence of helminth eggs is a concern. One particular fecal sludge sample from Senbagh had the highest number of helminth eggs (511 eggs/g), which had a strong influence on reported mean values. The values fall within the range

**Table 2** | Physical and chemical characteristics of sludge samples from single pit latrines ( $n = 30$  pits)

| District      | Moisture (wt%) | pH   | Conductivity (mmho/cm) | TVS (wt%) | TOC (wt%) | TN (wt%) | C/N   | PO <sub>4</sub> -P (wt%) |
|---------------|----------------|------|------------------------|-----------|-----------|----------|-------|--------------------------|
| Gazipur Sadar | 83.68          | 7.35 | 3.34                   | 68.56     | 36.38     | 3.7      | 9.52  | 2.1                      |
| Senbagh       | 88.1           | 7.08 | 5.02                   | 68.65     | 37.23     | 3.91     | 10.09 | 2.13                     |
| Phultola      | 91.34          | 7.94 | 4.76                   | 74.37     | 39.32     | 3.66     | 10.91 | 2.25                     |
| Bhaluka       | 90.54          | 7.73 | 3.51                   | 68.09     | 54.34     | 3.15     | 12.83 | 1.67                     |
| Chhagalnaiya  | 90.54          | 7.81 | 4.58                   | 77.88     | 41.19     | 3.98     | 11.12 | 2.49                     |
| Mean          | 88.84          | 7.58 | 4.24                   | 71.51     | 41.69     | 3.68     | 10.89 | 2.13                     |

Notes: TVS = Total volatile solids; TOC = Total organic carbon; TN = Total nitrogen; C/N = carbon to nitrogen ratio.

In each district, a one-time sample was drawn from each of six pits. In each case, prior to laboratory testing a composite sample was created by mixing samples taken from the bottom, middle and top of each pit. Percentages by weight and masses were calculated after drying.

Source: Authors' data.

**Table 3** | Microbiological characteristics of sludge from single pit latrines ( $n = 30$  pits)

| District      | Total coliforms, cfu/g | <i>E. coli</i> , cfu/g | Helminth eggs |  |
|---------------|------------------------|------------------------|---------------|--|
|               |                        |                        | Egg/g         | Group  |
| Gazipur Sadar | 5.20E + 06             | 3.50E + 06             | 20            | <i>Ascaris lumbricoides</i>  |
| Senbagh       | 7.90E + 04             | 2.30E + 04             | 119           | <i>Ascaris lumbricoides</i> , <i>Trichuris trichiura</i> , <i>Enterobius vermicularis</i> ,<br><i>Hymenolepis nana</i> |
| Phultola      | 1.40E + 05             | 9.80E + 04             | 32            | <i>Ascaris lumbricoides</i> , <i>Hymenolepis nana</i> ,  |
| Bhaluka       | 1.90E + 05             | 9.00E + 04             | 13            | <i>Enterobius vermicularis</i> , <i>Taenia spp</i>   |
| Chhagalnaiya  | 1.80E + 06             | 7.60E + 05             | 23            | <i>Enterobius vermicularis</i> , <i>Ascaris lumbricoides</i> ,   |
| Mean          | 1.50E + 06             | 9.00E + 05             | 41            |  |

Notes: Cfu = colony-forming units. In each district, a one-time sample was drawn from each of six pits. In each case, prior to laboratory testing a composite sample was created by mixing samples taken from the bottom, middle and top of each pit.

Source: Authors' data.

quoted in previous research (Strauss *et al.* 1997). The variability in helminth eggs is likely to have an impact on the risks faced by those who handle sludge, as well as the costs of treating it before disposal or re-use.

### Feasibility of pumps

The experts interviewed through the online survey were unanimous in suggesting that completely mechanized processes such as the Vacutug were not likely to be viable in Bangladesh (Opel & Bashir 2013). With narrow roads and latrines often located in the interiors of villages far from roads, vacuum trucks would not be able to access pits for emptying. Semi-mechanized processes were considered more viable due to having lower risks than manual processes and lower costs than a completely mechanized process. Four pumps, gulper, diaphragm, diesel, and electric, emerged as popular options for testing (Figure 3). The first two pumps do not require fuel, the last two do.

Table 4 provides a summary of experiences of using the selected pumps. The pit emptiers reported that the diesel and electric pumps were heavy and bulky to handle. The costs of energy also made them unpopular options. The diesel pump, especially, was reported to be suitable for only deep pits and was heavy to transport around. The high costs of using these pumps might also render the charges that would be levied on households too high.

The diaphragm emerges as the option most suited to rural areas. While the capital cost is relatively high, it does

not require energy to operate and is easy to maintain. It is lightweight and does not require a van or cart for transportation. The pump is easy to handle, needs only one person to operate, and its use involves a reasonable amount of time to prepare and empty the pit. The charges levied on households would be lower, and are comparable to those that households in the study whose pits were emptied were reported to be currently paying for manual emptying. Finally, it is unlikely to damage the pit latrine sub-structure or toilet superstructure.

### CONCLUSIONS

Bhaluka is characterized by high rates of access to latrines, and it is estimated that 15 million liters of sludge is generated annually. This sludge has a high water content and high levels of helminth eggs and fecal coliforms. Current emptying practices involve using simple tools and bare hands. This poses risks to those who handle sludge.

An organized service for emptying should incorporate into its design the use of pumps for minimizing risks to those who handle sludge. Given the nature of the sludge and the manner in which pit emptiers dispose of sludge from pits currently, introducing the use of protective personal equipment that reduces skin contact with sludge could be a first step. Additionally, the liquid nature of the sludge renders the use of a pump for emptying a feasible technical solution. A field test of a few options was carried



**Figure 3** | Pumps chosen for testing.

**Table 4** | Comparing different pumps to gauge feasibility of use in rural areas

|   | <b>Gulper</b> | <b>Diaphragm</b> | <b>Diesel</b> | <b>Electric</b> |
|---|---------------|------------------|---------------|-----------------|
| Capital costs/Purchasing costs (BDT)                  | 10–15K        | 25–30K           | 20–25K        | 10–15K          |
| Energy requirements                                   | None          | None             | Diesel        | Electricity     |
| Maintenance costs (annual, BDT)                       | 1–2K          | 1–2K             | 3–5K          | 2–3K            |
| Ease of use in rural areas                            | Difficult     | Easy             | Difficult     | Easy            |
| Ease of handling                                      | Difficult     | Easy             | Difficult     | Difficult       |
| Minimum labour requirement (per pit)                  | 2             | 1                | 2             | 1               |
| Van needed for transporting pump                      | Yes           | No               | Yes           | No              |
| Ideal pit depth (meters)                              | 0.91–1.52     | 0.91–3.05        | 3.05–4.57     | 0.91–3.05       |
| Probable emptying charges to be levied (per pit; BDT) | 0.5–1.5K      | 0.5–1.5K         | 1.5–2K        | 1.5–2K          |
| Spillage during emptying                              | Yes           | No               | Yes           | Yes             |
| Probability of damaging latrine during use            | High          | Low              | Med           | Low             |
| Preparation time (minutes)                            | 15–20         | 10–15            | 20–30         | 15–20           |
| Pit emptying time (minutes)                           | 20–30         | 15–20            | 5–10          | 10–15           |

Notes: This information comes from debriefing sessions with emptiers the research team had worked with, as well as emptiers in Bhaluka who had used these pumps. In 2014, 2015, and 2016, 1 USD = 78.5 BDT.



out in the field in 2014 where a diesel, electric and non-fuel based pumps (gulper and diaphragm) were used to empty pits. Despite its higher purchasing costs, the diaphragm emerged as the more feasible option as it has no fuel costs, is light in weight, can be operated by one person, can serve a variety of pit depths, and minimizes spillage of sludge.

The characteristics of sludge, and current methods for its emptying, motivate the need for a service introducing safe practices for handling sludge. In addition, current methods of disposing of sludge also suggest that the transportation of emptied sludge needs to be urgently considered. This is displayed in Balasubramanya *et al.* (2016a, 2016b), companion papers to this paper.

The current practice of emptying pit latrines poses a significant risk to those who handle the sludge. However, simple technologies such as the use of a pump can reduce exposure to pathogens. These aspects need to be incorporated into any sludge management system.

Finally, any solution around sludge management will involve designing service delivery models that transport sludge for treatment and disposal. To design a robust and sustainable model, the costs of service delivery, the nature and size of equipment and labor needed, and the ability of the government and households to contribute to the financing of such a system needs to be understood. This is explored further in Balasubramanya *et al.* (2016b), which is in review, using data and results presented in this current paper.

## ACKNOWLEDGEMENTS

This research was funded by the Embassy of the Kingdom of the Netherlands (Bangladesh) through IRC's Transnational Call on BRAC WASH Programme II, under contract number L13.0080/E11.34-WP5/479/mg. The Research Team acknowledges the contribution made during the design and implementation of research by Ms. Sharmin Farhat Obaid (Former Programme Manager, WASH, BRAC); and Dr. Elisabeth Kvarnström (Urban Water/SP Technical Research Institute of Sweden). Dr. Zahid Hayat Mahmud, ICDDR, B and the staff of Water & Sanitation for the Urban Poor (WSUP) in Dhaka helped in the

identification of key pit emptying technologies. We would like to thank participants at the Centre for Research on the Economics of Climate, Food, Energy and Environment (CECFEE) Workshop 2015, Indian Statistical Institute – Delhi, and participants at the South Asia Network for Development and Environment Economics (SANDEE)-IPS Summer School in Environment and Resource Economics 2015 for questions and comments.

## REFERENCES

- Balasubramanya, S., Evans, B., Ahmed, R., Habib, A., Asad, N. S. M., Rahman, M., Hasan, M., Dey, D. & Camargo-Valero, M. 2016a Take it away: the need for designing fecal sludge disposal services for single-pit latrines. *J. Water Sanit. Hyg. Dev.* (in review).
- Balasubramanya, S., Evans, B., Hardy, R., Ahmed, R., Habib, A., Asad, N. S. M., Rahman, M., Hasan, M., Dey, D., Fletcher, L. & Camargo-Valero, M. 2016b Towards sustainable sanitation management: establishing the costs and willingness to pay in rural districts with high rates of access to latrines. *PLOS One* (in review).
- BRAC 2015 Open defecation in country has been reduced from 42% in 2003 to 3% in 2014. Available from: <http://wash.brac.net/news-a-media/186-open-defecation-in-country-has-been-reduced-from-42-in-2003-to-3-in-2012>. (accessed 17 August 2015).
- Brouckaert, C. J., Foxon, K. M. & Wood, K. 2013 Modelling the filling rate of pit latrines. *Water SA* **39** (4), 555–562.
- Dzwaairo, B., Hoko, Z., Love, D. & Guzha, E. 2006 Assessment of the impacts of pit latrines on groundwater quality in rural areas: a case study from Marondera district, Zimbabwe. *Phys. Chem. Earth* **31** (15–16), 779–788.
- Evans, B., Fletcher, L. A., Camargo-Valero, M. A., Balasubramanya, S., Rao, K. C., Fernando, S., Ahmed, R., Habib, M. A., Asad, N. S. M., Rahman, M. M., Kabir, K. B. & Emon, M. H. 2015 *Value at the end of the Sanitation Value-Chain: Final Report*. IRC and University of Leeds. Available from: [www.ircwash.org/resources/vesv-value-end-sanitation-value-chain-final-report](http://www.ircwash.org/resources/vesv-value-end-sanitation-value-chain-final-report). (accessed 26 May 2016).
- Fewtrell, L., Kaufmann, R., Kay, D., Enanoria, W., Haller, L. & Colford Jr, J. M. 2005 Water, sanitation, and hygiene interventions to reduce diarrhoea in less developed countries: a systematic review and meta-analysis. *Lancet Infect. Dis.* **5** (1), 42–52.
- Franceys, R., Pickford, J. & Reed, R. 1992 *A Guide to the Development of On-site Sanitation*. World Health Organisation, Geneva.
- Fuller, J. A., Westphal, J. A., Kenney, B. & Eisenberg, J. N. S. 2015 *The joint effects of water and sanitation on diarrhoeal*

- disease: a multicountry analysis of the Demographic and Health Surveys. *Trop. Med. Int. Health* **20**, 284–292.
- Ministry of Planning 2012 *Community Report: Mymensingh Zila-June 2012. Population and Housing Census 2011*. Bangladesh Bureau of Statistics, Statistics and Informatics Division. Available from: <http://203.112.218.66/WebTestApplication/userfiles/Image/Census2011/Dhaka/Mymensingh/Mymensingh%20at%20a%20glance.pdf>. (accessed 13 February 2016).
- Niwagaba, C., Mbéguéré, M. & Strande, L. 2014 Faecal sludge quantification, characterisation and treatment objectives. In: *Faecal Sludge Management: Systems Approach for Implementation and Operation* (L. Strande, M. Ronteltap & D. Brdjanovic, eds). International Water Association Publishing, London.
- O'Loughlin, R., Fentie, G., Flannery, B. & Emerson, P. M. 2006 Follow-up of a low cost latrine promotion programme in one district of Amhara, Ethiopia: characteristics of early adopters and non-adopters. *Trop. Med. Int. Health* **11**, 1406–1415.
- Opel, A. & Bashar, M. K. 2013 Inefficient technology or misperceived demand: the failure of Vacutug-based pit-emptying services in Bangladesh. *Waterlines* **32** (3), 213–220.
- Prüss-Ustün, A., Bartram, J., Clasen, T., Colford, J. M., Cumming, O., Curtis, V., Bonjour, S., Dangour, A. D., De France, J., Fewtrell, L., Freeman, M. C., Gordon, B., Hunter, P. R., Johnston, R. B., Mathers, C., Mäusezahl, D., Medlicott, K., Neira, M., Stocks, M., Wolf, J. & Cairncross, S. 2014 Burden of disease from inadequate water, sanitation and hygiene in low- and middle-income settings: a retrospective analysis of data from 145 countries. *Trop. Med. Int. Health* **19**, 894–905.
- Still, D., Walker, N. & Hazelton, D. 2009 *Basic Sanitation Services in South Africa: Learning from the Past, Planning for the Future*. Research Report No. TT 414-09, Water Research Commission, South Africa.
- Strauss, M., Larmine, S. A. & Heinss, U. 1997 Treatment of sludges from on-site sanitation—Low cost options. *Water, Science and Technology* **35** (6), 129–136.
- WHO/UNICEF Joint Monitoring Programme for Water Supply and Sanitation 2004 *Meeting the MDG Drinking Water and Sanitation Target: a Mid-term Assessment of Progress*. World Health Organization, Geneva.
- WHO/UNICEF Joint Monitoring Programme for Water Supply and Sanitation 2015 *Progress on Sanitation and Drinking Water – 2015 Update and MDG Assessment*. World Health Organization, Geneva.

First received 1 March 2016; accepted in revised form 29 May 2016. Available online 30 June 2016